


# Balanced Belt

The left-wound and right-wound spirals are alternately arranged and jointed with the pre-crimped rods.

## ■ Designation

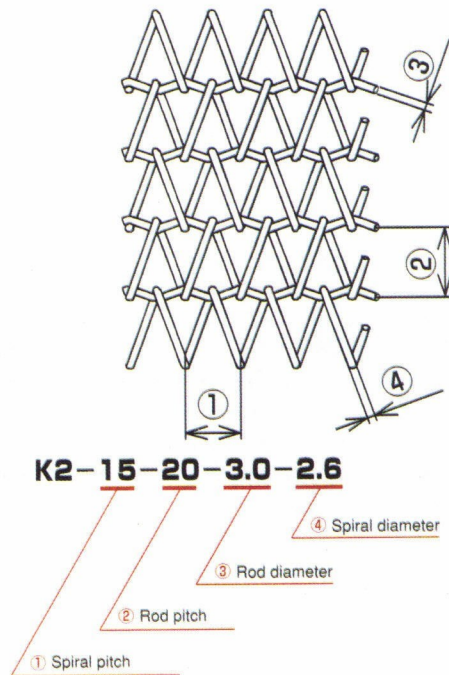

### Advantages

- Widest range of application.
- Stable construction for straight belt running.

## ■ Typical specification (nominal size)

Specification	Weight(kg/m <sup>2</sup> )
K2-40-50-6.0-5.0	15.0
K2-25-30-5.0-5.0	23.7
K2-30-40-5.0-4.0	12.7
K2-20-25-5.0-4.0	21.5
K2-15-20-4.0-4.0	25.4
K2-20-25-4.0-3.4	14.4
K2-25-30-4.0-3.2	10.4
K2-15-20-3.4-3.2	16.0
K2-20-25-3.4-3.0	10.7
K2-15-20-3.2-3.0	13.9
K2-10-15-3.2-3.0	21.9
K2-15-20-3.0-2.6	10.6
K2-10-15-2.6-2.6	15.3
K2-15-20-2.6-2.3	8.0
K2-10-15-2.6-2.3	12.3
K2- 8-12-2.3-2.3	15.3
K2-12-18-2.3-2.0	7.4
K2- 8-12-2.3-2.0	12.1

Specification	Weight(kg/m <sup>2</sup> )
K2- 6- 9-2.0-2.0	16.1
K2-10-15-2.0-1.8	7.2
K2- 6- 9-1.8-1.8	12.6
K2-10-15-1.8-1.6	5.6
K2- 7-10-1.8-1.6	8.7
K2- 5- 7-1.6-1.6	12.7
K2- 8-12-1.6-1.4	5.5
K2- 5- 7-1.4-1.4	9.3
K2- 9-13-1.6-1.2	3.9
K2- 6- 9-1.4-1.2	5.6
K2- 4- 6-1.2-1.2	8.5
K2- 6- 9-1.2-1.0	3.8
K2- 4- 6-1.2-1.0	6.2
K2- 3- 4-1.0-1.0	8.6
K2- 4- 6-1.0-0.9	4.7
K2- 3- 4-1.0-0.9	7.2
K2- 4- 5-1.0-0.8	4.3
K2- 3- 4-0.9-0.8	5.5