

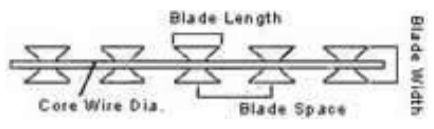



Reference Number	Blade Style	Thick	Wire Dia	Barb Length	Barb Width	Barb spacing
		ness				
BTO-12		0.5	2.5	10	13	26±1
		±0.05	±0.1	±1	±1	
BTO-18		0.5	2.5	15	15	33±1
		±0.05	±0.1	±1	±1	
BTO-22		0.5	2.5	22	15	34±1
		±0.05	±0.1	±1	±1	
CBT-65		0.6	2.5	65	21	100±2
		±0.05	±0.1	±2	±1	

Barbed Tape Concertina (BTC); Barbed Tape Obstacle (BTO)

Standard materials are either galvanized or stainless steel.

Standard packages products are shown in the tables above, special specifications available on request.

### Barbed Tape Wire Specification:

Outside Diameter	No. of Loops	Standard Length per Coil	Type	Notes
450mm	33	8M	CBT-65	Single coil
500mm	41	10M	CBT-65	Single coil
700mm	41	10M	CBT-65	Single coil
960mm	53	13M	CBT-65	Single coil
500mm	102	16M	BTO-10.15.22	Cross type
600mm	86	14M	BTO-10.15.22	Cross type
700mm	72	12M	BTO-10.15.22	Cross type
800mm	64	10M	BTO-10.15.22	Cross type
960mm	52	9M	BTO-10.15.22	Cross type