



Flat Flex Belt

Usually these belts are called Chocolate Conveyor belts which are made by assembling the successively bent wires.

■ Designation

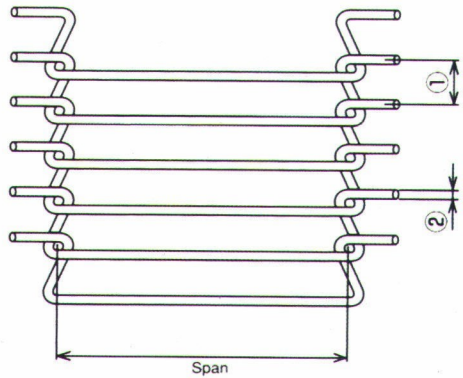


BL-10-1.6-13-S

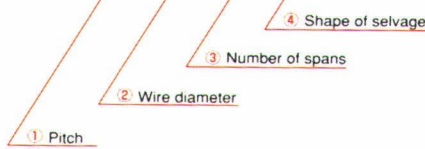

Advantages

- The sprocket drive ensures positive and stable running.
- The rotation diameter at terminals is small, so that smooth products transfer is ensured.
- Easy washing is ensured.
- Because of large open area, high air permeability and dehydration capacity are ensured.

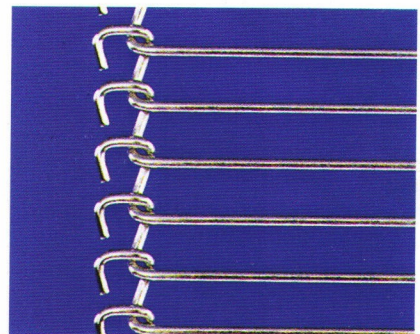

Selvage shape S

■ Standard specification (nominal size)

Pitch (mm)	5	8	7	7	10	13	15	15	18	20	20	20	19.05
Wire diameter (mm)	0.9	1	1.2	1.4	1.6	1.8	2	2.3	2.6	3	3.2	3.5	5
Minimum span (mm)	30	30	30	30	30	40	40	50	60	100	130	150	300
Overall width (mm)	30~4200												