



The flat wires are arranged in the form of lattice and jointed with the straight rods.

■ Designation

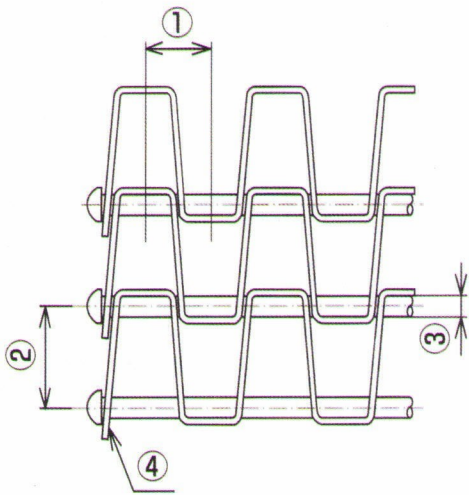

FW-24-27.3-5.0-(1.5×12.7)

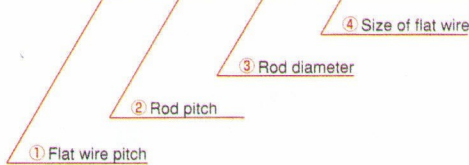

Advantages

- The positive sprocket drive ensures stable running.
- Large open area ensures high air permeability and dehydration capacity.
- Because the belt has smooth surface, it can carry unstable products.
- The belt can be easily washed.
- CFW can be used for the curved conveyor.

Flat Wire Belt

■ Standard specification (nominal size)

Specification	Weight(kg/m ²)
FW - 24 - 27.3 - 5.0 - (1.5 × 12.7)	17.6
FW - 18 - 27.4 - 5.0 - (1.5 × 12.7)	19.7
FW - 12.7 - 25.4 - 5.0 - (1.5 × 12.7)	23.9
FW - 12.7 - 25.4 - 5.0 - (1.5 × 14.1)	26.1
FW - 25.4 - 25.4 - 5.0 - (1.2 × 14.1)	17.0
FW - 12.7 - 25.4 - 5.0 - (1.2 × 14.1)	22.0
FW - 14 - 19.05 - 4.0 - (1.2 × 12.0)	19.9
FW - 24 - 27.4 - 3.0 - (1.2 × 9.5)	9.1
FW - 16 - 27.4 - 3.0 - (1.2 × 9.5)	11.0
FW - 15 - 27 - 3.0 - (1.2 × 14.1)	16.6
FW - 14 - 13.7 - 3.0 - (1.2 × 9.5)	17.2
CFW - 24 - 27.3 - 5.0 - (1.5 × 12.7)	16.5
CFW - 18 - 27.4 - 5.0 - (1.5 × 12.7)	17.0